


SIMPLEX PATCH CORD G657A1 SC/UPC-SC/APC LSZH 3.0MM

Features

- Single-mode single-fiber for signal transmission.
- Low insertion loss due to small fiber core diameter.
- High-speed transmission (1 Gbps, 10 Gbps, etc.) for data centers and enterprise networks.
- Long-distance transmission supported by single-mode fiber.
- High reliability with a single fiber core to reduce the risk of transmission failures.

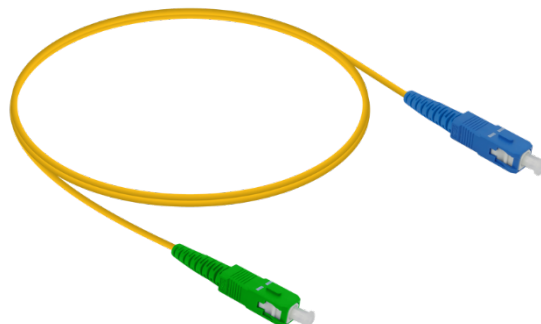

General

Interface, Connector A
 Interface, Connector B
 Fiber Type
 Fiber Count
 Jacket Material

SC/UPC
 SC/APC
 G657A1
 Simplex
 LSZH

Dimensions

Length
 Cable Diameter

Customized
 3.0 mm

Technical

Storage Temperature
 Operating Temperature
 Insertion Loss
 Return Loss

-40°C to 85°C
 -20°C to 85°C
 0.3 dB Max. (IEC 61300-3-4)
 50/60 dB Min. (UPC/APC)
 (IEC 61300-3-6)
 0.2 dB Max.
 1000 times Min.

Interchangeability
 Durability

Compliance

Applicable
 Standards

RoHS2.0
 Telcordia GR-326-CORE



Proprietary information of SIGHTES TECHNOLOGY that may not be reproduced, disclosed or used for any purpose except under the authorized written consent of SIGHTES TECHNOLOGY and may be recalled at any time. Copyright 2022 SIGHTES TECHNOLOGY. All Rights Reserved

Apr 4 2023