


### 2×8 MINI TYPE PLC SPLITTER SC/APC

#### Features

- Compact size for space-saving installation
- High splitting ratio for efficient use of network resources
- Low insertion loss and uniform distribution of signals for minimal signal degradation
- Wide operating temperature range for versatile deployment in various environments
- High durability and reliability for long-lasting performance in fiber optic networks.

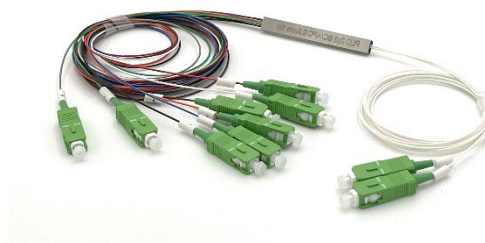

#### General

Configuration Type  
Connector  
Fiber Mode  
Fiber Type  
Splitter Type

2×8  
SC/APC  
Single-mode  
G.657A1  
Mini

#### Dimensions

Fiber Length  
Fiber Diameter  
Steel Tube Dimensions

Customized  
900 μm  
50\*4\*4 mm

#### Technical

Operating Temperature  
Operating Bandwidth  
Insertion Loss  
Uniformity of Insert Loss  
Polarization Dependent Loss  
Return Loss  
Directivity

-40 °C to+85 °C  
1260~1650nm  
11.0dB Max.  
1.2dB Max.  
0.3dB Max.  
55dB Min.  
55dB Min.

#### Compliance

Applicable  
Flammability  
Standards

RoHS2.0  
UL94-V0  
IEC 61300-3-4



Proprietary information of SIGHTES TECHNOLOGY that may not be reproduced, disclosed or used for any purpose except under the authorized written consent of SIGHTES TECHNOLOGY and may be recalled at any time. Copyright 2022 SIGHTES TECHNOLOGY. All Rights Reserved  
Apr 4 2023