


Fiber Optic Rosette

Features

- Installation without grinding, dispensing, supplies
- High quality, high success rate, high reliability
- Small size, high quality with ABS plastic material
- Easy to install and fast Installation
- Used in FTTH indoor application, home, or work area

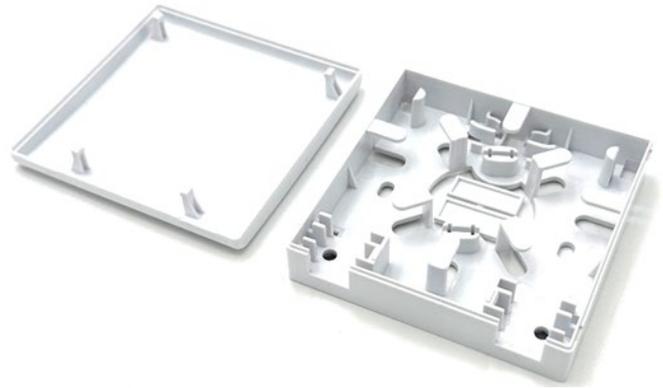

Specifications

General	
Outlet, quantity	2
Splice Capacity	2
Interface (optional)	N/A, SC/APC, SC/UPC
Adaptors, quantity (optional)	N/A, 2 pre-installed max.
Dimension	86*86*24mm
Material	ABS
Mounting	Wall
Optical	
Fiber Mode	N/A, G657 A1, G657 A2
Fiber Type	N/A, Single Mode
Designed Bend Radius, minimum	15mm
Insertion Loss, Adaptor, maximum	0.30dB
Return Loss, Adaptor, minimum	55dB
Insertion & Extraction Endurance	1,000 durations
Environmental	
Flammability Rating (optional)	N/A, UL94-V0, UL94-V2
Operation Temperature	-40 to +60°C
Relative Humidity	85% (+30°C) Max.
Atmospheric Pressure	70 to 106 KPa
Insulation Resistance	1000MΩ /500V DC Min.
Withstand voltage	3000V DC /1min. Min.

Drawing

